

A

B

C

D


E

F

REV	DESCRIPTION	DESIGN	DATE
A0	Release	吴丹平	2015.07.15




1

1

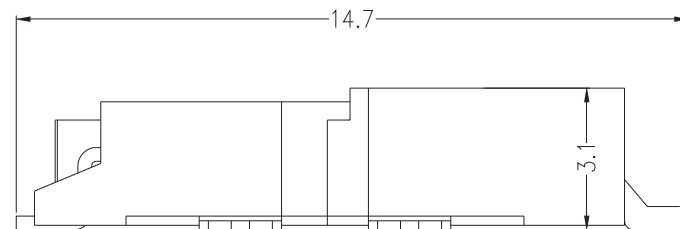

2

2

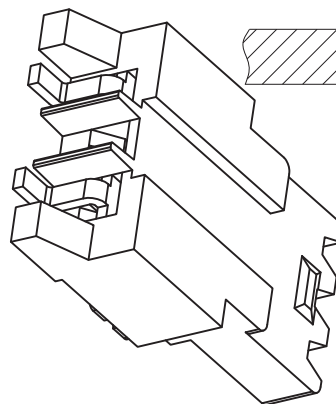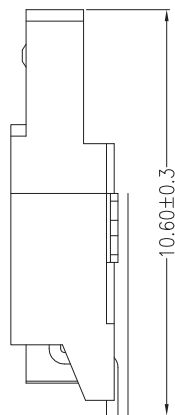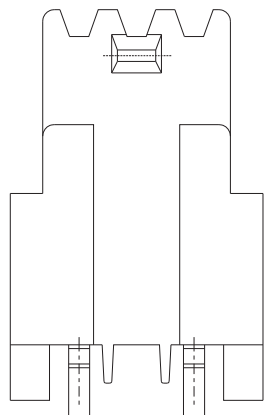

主要技术参数 Main Specifications

线 数 (Poles): 02P
 接触电阻 (Contact resistance): $\leq 20\text{m}\Omega$
 绝缘电阻 (Insulation resistance): $\geq 1000\text{M}\Omega$
 额定电压 (Rated voltage): 150 V AC DC
 额定电流 (Rated current): 1.0A AC DC
 耐电压 (Withstand Voltage): 1000V AC/minute
 温度范围 (Temperature Range): $-25^{\circ}\text{C} \sim +105^{\circ}\text{C}$

3


3

ORDER INFORMATION:

B3001P-02-F2MB-R			
PART No.			
No. OF CIRCUITS:	02		PACKAGING: R=REEL P=PE
PLASTIC MATERIAL:			PLATING: B=MATTE Sn
F2M=LCP (BEIGE)			

4

4

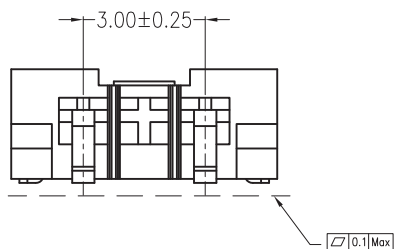

5

Board Layout
 General Tolerance: ± 0.05

ITEM	COMPONENT	Q'TY	MATERIAL	FINISH
C	Solder Tab	2 PCS	PhosphorBronze	MATTE Sn-plated
B	CONTACT	2 PCS	PhosphorBronze	MATTE Sn-plated
A	PEDESTAL	1 PCS	LCP	UL 94V-0, COLOR:BEIGE

JKUN 温州健坤接插件有限公司
WENZHOU JKUN CONNECTOR CO., LTD.

TITLE: -
3.0mmPITCH 90°WAFER SMT TYPE

X.±0.5 X.±5'

USE:
CUSTOMER

PART NO.:

.X±0.3 .X±2'

APPD:
邵敬和

B3001P-02-F2MB-R

.XX±0.25 .XX±1'

CHKD:
田峰

DWG NO.:
JKUN/GCCP-0591

-- --

DR:
吴丹平

SCALE
1 : 1

SHEET
1 / 1



UNITS:
mm

A

B

C

D

E

F